





# MOTO TRAX PVT LTD.

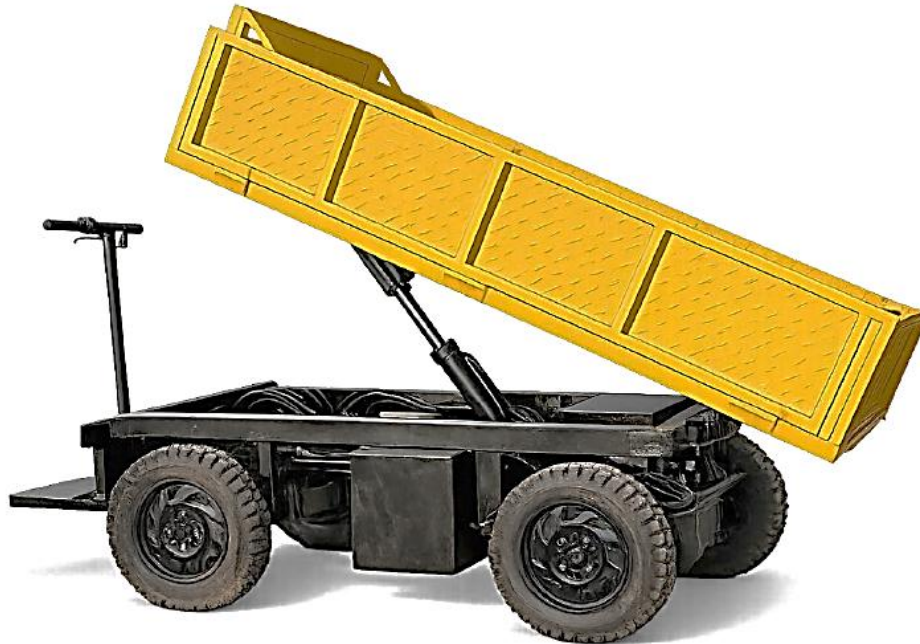

## Silent Features



-Highly Efficient, Durable BLDC drives for high traction and low power consumption.

-Heavy Duty Differential Axles with direct mount with motor for enhance efficiency.

-High range of operational voltage starting from 36v to 72v as per specifications.

-Pne / Solid Rubber heavy duty tyres in all size and with high load carrying capacity

-Safety Highly effective brakes,

Ignition switch, isolated drive system

-Steering manual, highly comfortable  
Steering of fatigue free rides.

-Customization offers very high range of  
Product customization as per requirements.

- Manual and Motor Powered hydraulic  
both options available.



Plant Address: Plot No- 7, Gram Kotra, Mandideep Kolar Road, Gram ,  
Bhopal 462042 Madhya Pradesh

Mail: [mototrax4@gmail.com](mailto:mototrax4@gmail.com) Phone: 9229110501



# MOTO TRAX PVT LTD.

| ELECTRIC TIPPING TROLLEY |                                   |                                   |                                   |                                   |
|--------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| SPECIFICATION            | 0.5 TON ETT                       | 1.0 TON ETT                       | 1.5 TON ETT                       | 2.0 TON ETT                       |
| MODEL                    | ET-0.5T                           | ET-1.0T                           | ET-1.5T                           | ET-2.0T                           |
| Operation                | Walking /<br>Standing /<br>Seated | Walking /<br>Standing /<br>Seated | Walking /<br>Standing /<br>Seated | Walking /<br>Standing /<br>Seated |
| Wheel                    | 4 Wheeler                         | 4 Wheeler                         | 4 Wheeler                         | 4 Wheeler                         |
| Tyre                     | Pne. Rubber                       | Pne. Rubber                       | Pne. Rubber                       | Pne. /<br>Solid Rubber            |
| Over All Length <b>A</b> | 1700/ 2000mm                      | 1900/2250mm                       | 2100/ 2400mm                      | 2250/ 2550mm                      |
| Over All Width <b>B</b>  | 750mm                             | 850mm                             | 1000mm                            | 1100mm                            |
| Bucket                   | 250mm                             | 350mm                             | 450mm                             | 600mm                             |
| Over All Height <b>C</b> | 1250                              | 1250                              | 1250                              | 1350                              |
| Battery Options          | Lead Acid / Lithium-Ion           | Lead Acid /<br>Lithium-Ion        | Lithium-Ion                       | Lithium-Ion                       |
| Operation Volt           | 48v                               | 48V                               | 48V                               | 48v/60V                           |
| Speedometer              | Digital                           | Digital                           | Digital                           | Digital                           |
| Battery Indicator        | Digital                           | Digital                           | Digital                           | Digital                           |
| Speed Laden              | 10-12Kmph                         | 10-12Kmph                         | 8-10kmph                          | 8-10Kmph                          |
| Speed Unladen            | 12-14Kmph                         | 12-14Kmph                         | 10-12kmph                         | 10-12kmph                         |
| Gradient Laden           | 8%                                | 8%                                | 8%                                | 8%                                |
| Gradient Unladen         | 11%                               | 11%                               | 11%                               | 11%                               |
| Service Brake            | Mechanical                        | Mechanical                        | Hydraulic                         | Hydraulic                         |
| Brake Drum Size          | 180mm                             | 180mm                             | 180mm                             | 220mm                             |

**Note: We Offer high range of customizations in Electric Tipping Trolley in terms of Size, Operation type, Performance , Battery etc, based on customer requirements.**

**Plant Address: Plot No- 7, Gram Kotra, Mandideep Kolar Road, Gram ,  
Bhopal 462042 Madhya Pradesh**

**Mail: [mototrax4@gmail.com](mailto:mototrax4@gmail.com) Phone: 9229110501**



# MOTO TRAX PVT LTD.



\*Slightly Changes is possible in specification/ Sizes with in tolerance limits\*

**Plant Address: Plot No- 7, Gram Kotra, Mandideep Kolar Road, Gram ,  
Bhopal 462042 Madhya Pradesh**

**Mail: [mototrax4@gmail.com](mailto:mototrax4@gmail.com) Phone: 9229110501**